


S/FTP 4pairs cable category6



COLOUR:  
 BLUE-WHITE/BLUE  
 ORANGE-WHITE/ORANGE  
 GREEN-WHITE/GREEN  
 BROWN-WHITE/BROWN

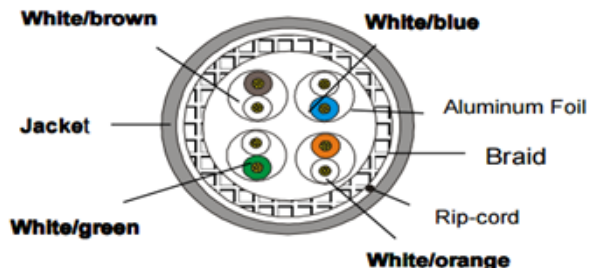

grey  
 93953 100m  
 95693 305m



white  
 94217 100m  
 94218 305m

CABLE DESCRIPTION

**1-CONDUCTOR**

TYPE:STRANDED-Copper clad aluminum wire  
 DIAMETER:7/0.19mm AWG:26/7

**2-INSULATION**

TYPE:PE solid  
 DIAMETER:1.0mm±0.01mm

**3-PIMF:every pair with the AL FOIL shield**

**4-Braiding**

AL wire 80\*0.12mm Coverage 60%

**5-RIP CORD**

YES

**6-OUTER JACKET**

TYPE:PVC  
 COLOUR:GREY  
 THICKNES:0.60mm  
 EXTERNAL DIAMETER:6.3mm±0.2mm  
 PASS 40m FLUKE TEST

PARAMETER	UNIT	VALUE
Max.linear tesistance.	Ω /km	≤180
Mutual capacity(nom.)	pF/m	50
Unbalance capacity max	pF/km	1600
Characteristic impedance (1 at 100 MHz)	Ω	100±15
VELOCITY OF PROPAGATION (f> 1MHz)	%of c	66

Marking

CAT6 STRANDED / PATCH CORD EIA/TIA 568  
 4x2xAWG 26/7 S/FTP PIMF/ SHIELDED 250 MHz  
 Reaction to fire: Eca; EN 50575:2014+A1: 2016

ELECTRICAL CHARACTERISTICS

Frequency (MHz)	Return loss(dB)	Attenuatin (dB/100m)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PSELFEXT (dB)
1			65,3	62,3	63,8	60,8
4			56,3	53,3	51,8	48,8
10			50,3	47,3	43,8	40,8
16			47,2	44,2	39,7	36,7
20			45,8	42,0	37,8	34,8
25			44,3	41,3	35,8	32,8
31,25			42,9	39,9	33,9	30,9
62,5			38,4	35,4	27,9	24,9
100			35,3	32,3	23,8	20,8

OTHER CHARACTERISTICS

MINIMUM BENDING RADIUS:10×Diameter  
 PACKING:100m/ROLL  
 305m/BOX



Wentronic GmbH  
 Pillmannstraße 12  
 38112 Braunschweig